

PROZON


TECHNICAL DATA SHEET

CLEANFOAM<sup>®</sup>  
SWAB  
SERIES

*Non-Sterile*

*Sterile*

### TECHNICAL DATA SHEET

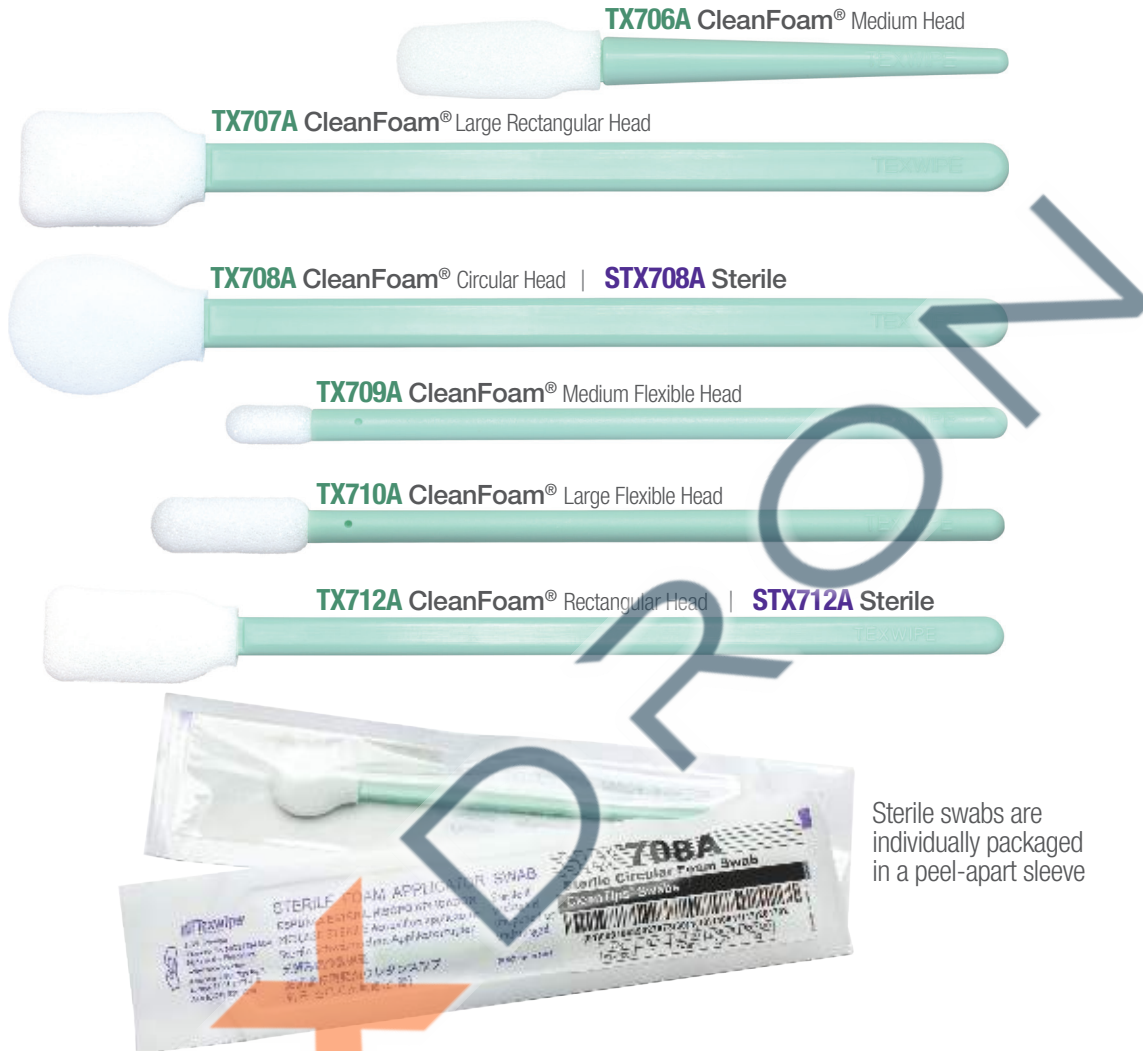


Sterile swabs are individually packaged in a peel-apart sleeve

### Products

Number	Description	Sterile	Packaging	Case
<b>TX706A</b>	CleanFoam® Medium Head Swab		100 swabs/bag; 2 inner bags of 50 swabs	10 bags
<b>TX707A</b>	CleanFoam® Large Rectangular Head Swab		100 swabs/bag; 2 inner bags of 50 swabs	10 bags
<b>TX708A</b>	CleanFoam® Circular Head Swab		100 swabs/bag; 2 inner bags of 50 swabs	10 bags
<b>TX709A</b>	CleanFoam® Medium Flexible Head Swab		100 swabs/bag; 2 inner bags of 50 swabs	10 bags
<b>TX710A</b>	CleanFoam® Large Flexible Head Swab		100 swabs/bag; 2 inner bags of 50 swabs	10 bags
<b>TX712A</b>	CleanFoam® Rectangular Head Swab		100 swabs/bag; 2 inner bags of 50 swabs	10 bags
<b>STX708A</b>	CleanFoam® Circular Foam Swab, Sterile	●	1 swab/sleeve, 50 swabs/inner bag, triple bagged	10 bags
<b>STX712A</b>	CleanFoam® Rectangular Foam Swab, Sterile	●	1 swab/sleeve, 50 swabs/inner bag, triple bagged	10 bags

TECHNICAL DATA SHEET

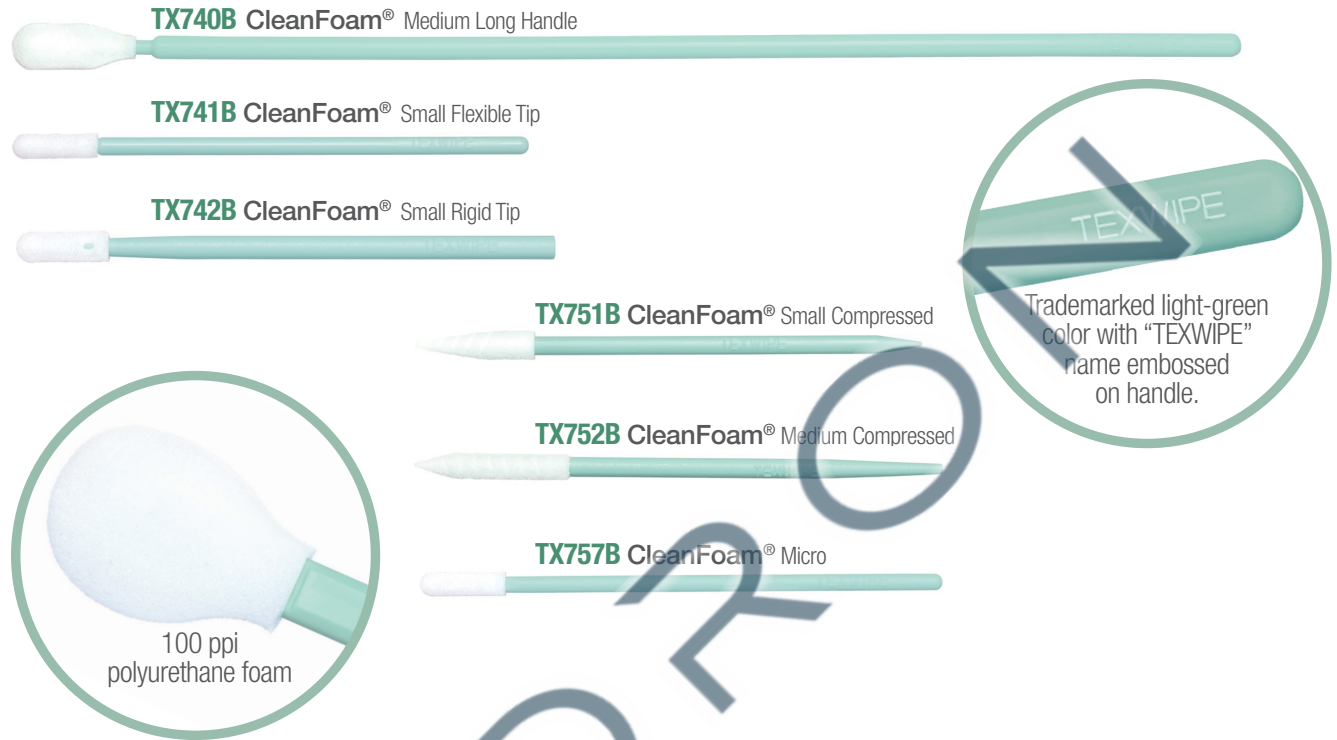

**Products**

Number	Description	Packaging	Case
<b>TX740B</b>	CleanFoam® Medium Swab with long handle	500 swabs/bag; 5 inner bags of 100 swabs	5 bags
<b>TX741B</b>	CleanFoam® Small Swab with flexible tip	500 swabs/bag; 5 inner bags of 100 swabs	5 bags
<b>TX742B</b>	CleanFoam® Small Swab with rigid tip	500 swabs/bag; 5 inner bags of 100 swabs	5 bags
<b>TX751B</b>	CleanFoam® Small Compressed Swab	500 swabs/bag; 5 inner bags of 100 swabs	5 bags
<b>TX752B</b>	CleanFoam® Medium Compressed Swab	500 swabs/bag; 5 inner bags of 100 swabs	5 bags
<b>TX757B</b>	CleanFoam® Micro Swab	500 swabs/bag; 5 inner bags of 100 swabs	5 bags

TECHNICAL DATA SHEET

**Description**

Texwipe's CleanFoam® Swab Series is constructed from the highest quality 100 ppi polyurethane foam. Complete thermal bond construction eliminates the risk of adhesive contamination.

Cleanroom processed, providing low levels of Non-Volatile Residue (NVR) and ions, and made to exacting and consistent tolerances using high-precision automated processes.

Packaged in silicone-free and amide-free bags.

CleanFoam® Swabs are available in non-sterile and sterile.

**Applications**

- Applying and removing lubricants, adhesives, and other solutions in a critical clean environment
- Scrubbing recessed areas
- Removal of excess materials or debris
- Cleaning intersecting surfaces and joints
- Cleaning with compatible solutions and solvents
- Picking up fine powders

**Industries**

Aerospace	Animal Laboratory	Biologics
Cleanroom Design/Build	Compounding Pharmacies	Data Storage
Facilities Maintenance	Industrial	Laboratory
Medical Device	Microelectronics	Pharmaceutical
Printing/Graphics	Semiconductor	USP <797> / USP <800>

**Features & Benefits**

- Good chemical compatibility with a variety of solutions
- Readily absorbs solvents and solutions and grabs particulates.
- 100% polypropylene handle ensures no additional contaminants are introduced while offering excellent chemical resistance
- Trademarked light-green colored handles with "TEXWIPE" name embossed on handle
- Autoclave safe
- Lot coded for traceability and quality control

**CleanFoam® Sterile Swabs**

- Each swab is individually packaged in a peel-apart sleeve
- Each sleeve is lot coded and has an expiration date (for inventory control)
- Fifty sleeves are triple-bagged for easy introduction into sterile area
- Triple-bagged bags are packaged in a case liner forming the fourth layer of bag protection
- Gamma-irradiated to a Sterility Assurance Level of 10<sup>-6</sup> and sterile validated according to AAMI Guidelines
- Tested for endotoxins, ions, and NVR

**Shelf Life**

- Non-Sterile – 5 years from date of manufacture
- Sterile – 3 years from date of manufacture

### TECHNICAL DATA SHEET

#### Physical Characteristics

	TX706A	TX707A	TX708A / STX708A	TX709A	TX710A	TX712A / STX712A
Head material	100 ppi CleanFoam® polyurethane foam	100 ppi CleanFoam® polyurethane foam	100 ppi CleanFoam® polyurethane foam	100 ppi CleanFoam® polyurethane foam	100 ppi CleanFoam® polyurethane foam	100 ppi CleanFoam® polyurethane foam
Head width	10.9mm (0.429")	15.0mm (0.591")	19.7mm (0.776")	4.8mm (0.189")	7.0mm (0.276")	12.7mm (0.500")
Head thickness	8.5mm (0.335")	8.8mm (0.346")	9.4mm (0.370")	4.2mm (0.165")	5.9mm (0.232")	7.8mm (0.307")
Head length	27.0mm (1.063")	25.0mm (0.984")	26.4mm (1.040")	12.0mm (0.472")	20.4mm (0.803")	25.7mm (1.012")
Handle material	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene
Handle width	6.3mm (0.248")	6.6mm (0.260")	6.6mm (0.260")	4.3mm (0.169")	4.3mm (0.169")	5.2mm (0.205")
Handle thickness	6.3mm (0.248")	3.2mm (0.126")	3.2mm (0.126")	4.3mm (0.169")	4.3mm (0.169")	3.0mm (0.118")
Handle length	54.0mm (2.126")	106.0mm (4.173")	105.8mm (4.154")	92.5mm (3.642")	92.5mm (3.642")	101.8mm (4.008")
Total swab length	81.0mm (3.189")	131.0mm (5.157")	132.2mm (5.205")	104.0mm (4.08")	113.0mm (4.45")	127.5mm (5.020")
Head bond	Thermal	Thermal	Thermal	Thermal/Epoxy	Thermal/Epoxy	Thermal
Handle color	Light green	Light green	Light green	Light green	Light green	Light green
Design notes	Flexible head paddle; rounded, compact handle	Rigid head paddle; long, easy-grip handle	Rigid head paddle; long, easy-grip handle	Flexible nylon head paddle; medium handle	Flexible nylon head paddle; medium handle	Rigid head paddle; long, easy-grip handle

#### Contamination Characteristics

Ions, µg/swab	TX706A	TX707A	TX708A	TX709A	TX710A	TX712A
Calcium	0.16	0.01	0.18	0.02	0.14	0.12
Chloride	0.62	0.34	1.01	0.54	0.43	0.84
Fluoride	0.18	0.01	0.15	0.01	0.13	0.18
Magnesium	0.04	0.03	0.05	0.01	0.01	0.03
Nitrate	0.04	0.01	0.24	0.11	0.17	0.22
Phosphate	0.38	0.01	0.67	0.03	0.61	0.57
Potassium	0.12	0.06	0.04	0.13	0.03	0.08
Sodium	0.12	0.04	0.29	0.15	0.16	0.34
Sulfate	0.18	0.16	0.42	0.17	0.47	0.61

#### Non-Volatile Residue, mg/swab

DIW extractant	0.15	0.20	0.24	0.15	0.17	0.27
IPA extractant	0.48	0.56	0.63	0.24	0.49	0.61

### TECHNICAL DATA SHEET

#### Physical Characteristics

	TX740B	TX741B	TX742B	TX751B	TX752B	TX757B
Head material	100 ppi CleanFoam®	100 ppi CleanFoam®	100 ppi CleanFoam®	100 ppi CleanFoam®	100 ppi CleanFoam®	100 ppi CleanFoam®
Head width	6.2mm (0.244")	3.4mm (0.134")	3.6mm (0.142")	3.5mm (0.138")	3.4mm (0.134")	3.2mm (0.126")
Head thickness	5.0mm (0.197")	3.0mm (0.118")	3.5mm (0.138")	3.5mm (0.138")	3.4mm (0.134")	2.6mm (0.102")
Head length	17.0mm (0.669")	10.5mm (0.413")	12.0mm (0.472")	16.0mm (0.630")	20.0mm (0.787")	10.0mm (0.394")
Handle material	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene	Polypropylene
Handle width	3.2mm (0.126")	2.4mm (0.094")	3.0mm (0.118")	2.4mm (0.094")	2.5mm (0.098")	2.2mm (0.087")
Handle thickness	3.2mm (0.126")	2.4mm (0.094")	3.0mm (0.118")	2.4mm (0.094")	2.5mm (0.098")	2.2mm (0.087")
Handle length	146.0mm (5.748")	56.8mm (2.24")	59.0mm (2.323")	51.0mm (2.010")	50.0mm (1.969")	59.7mm (2.350")
Total swab length	163.0mm (6.417")	67.3mm (2.65")	71.0mm (2.795")	67.0mm (2.638")	70.0mm (2.756")	69.7mm (2.744")
Head bond	Thermal	Thermal	Thermal	Thermal	Thermal	Thermal
Handle color	Light green	Light green	Light green	Light green	Light green	Light green
Design notes	Flexible head paddle; long handle	Flexible head tip; compact handle	Rigid head core; compact handle	Precision pointed tip; compact handle	Precision pointed tip, side ridges; compact handle	Flexible head paddle; compact handle

#### Contamination Characteristics\*

Ions, µg/swab	TX740B	TX741B	TX742B	TX751B	TX752B	TX757B
Calcium	0.03	0.03	0.01	0.01	0.01	0.01
Chloride	0.04	0.06	0.03	0.07	0.03	0.05
Fluoride	0.01	0.01	0.01	0.01	0.01	0.01
Magnesium	0.03	0.01	0.01	0.01	0.01	0.01
Nitrate	0.01	0.04	0.04	0.01	0.01	0.01
Phosphate	0.01	0.04	0.04	0.01	0.01	0.01
Potassium	0.02	0.02	0.02	0.01	0.01	0.01
Sodium	0.09	0.06	0.02	0.01	0.05	0.06
Sulfate	0.07	0.03	0.05	0.03	0.01	0.03

#### Non-Volatile Residue, mg/swab

DIW extractant	0.12	0.03	0.03	0.03	0.07	0.03
IPA extractant	0.04	0.01	0.01	0.02	0.03	0.01

Note: The data in this table represent typical analyses.

\***Test Methods:** Available upon request. Contact Texwipe Customer Service at [www.texwipe.com](http://www.texwipe.com) or [info@texwipe.com](mailto:info@texwipe.com) for a copy.

**Storage Conditions:** Store at ambient conditions, defined as temperatures between 59°F (15°C) and 86°F (30°C).

*Texwipe holds an ISO 9001:2015 registration.*

*All Texwipe products conform to GHS classification for labeling (where applicable).*

*Shipping classification based on weight of inner package.*

*Non-Sterile – Made in The Philippines*

*Sterile – Made in The Philippines, Irradiated in the USA*

# EXDRON



<b>Americas</b>	+1 336 996 7046
<b>EMEA</b>	+31 88 1307 410
<b>Philippines</b>	+63 49 543 0241
<b>China</b>	+86 512 6303 3700

[texwipe.com](http://texwipe.com)